

# MIDWEST CONTRACTOR


*Serving Nebraska, Iowa, Kansas, and Western Missouri*

**South Edition**

**November 12, 2001**



**We Will  
Never Forget...  
September 11, 2001**

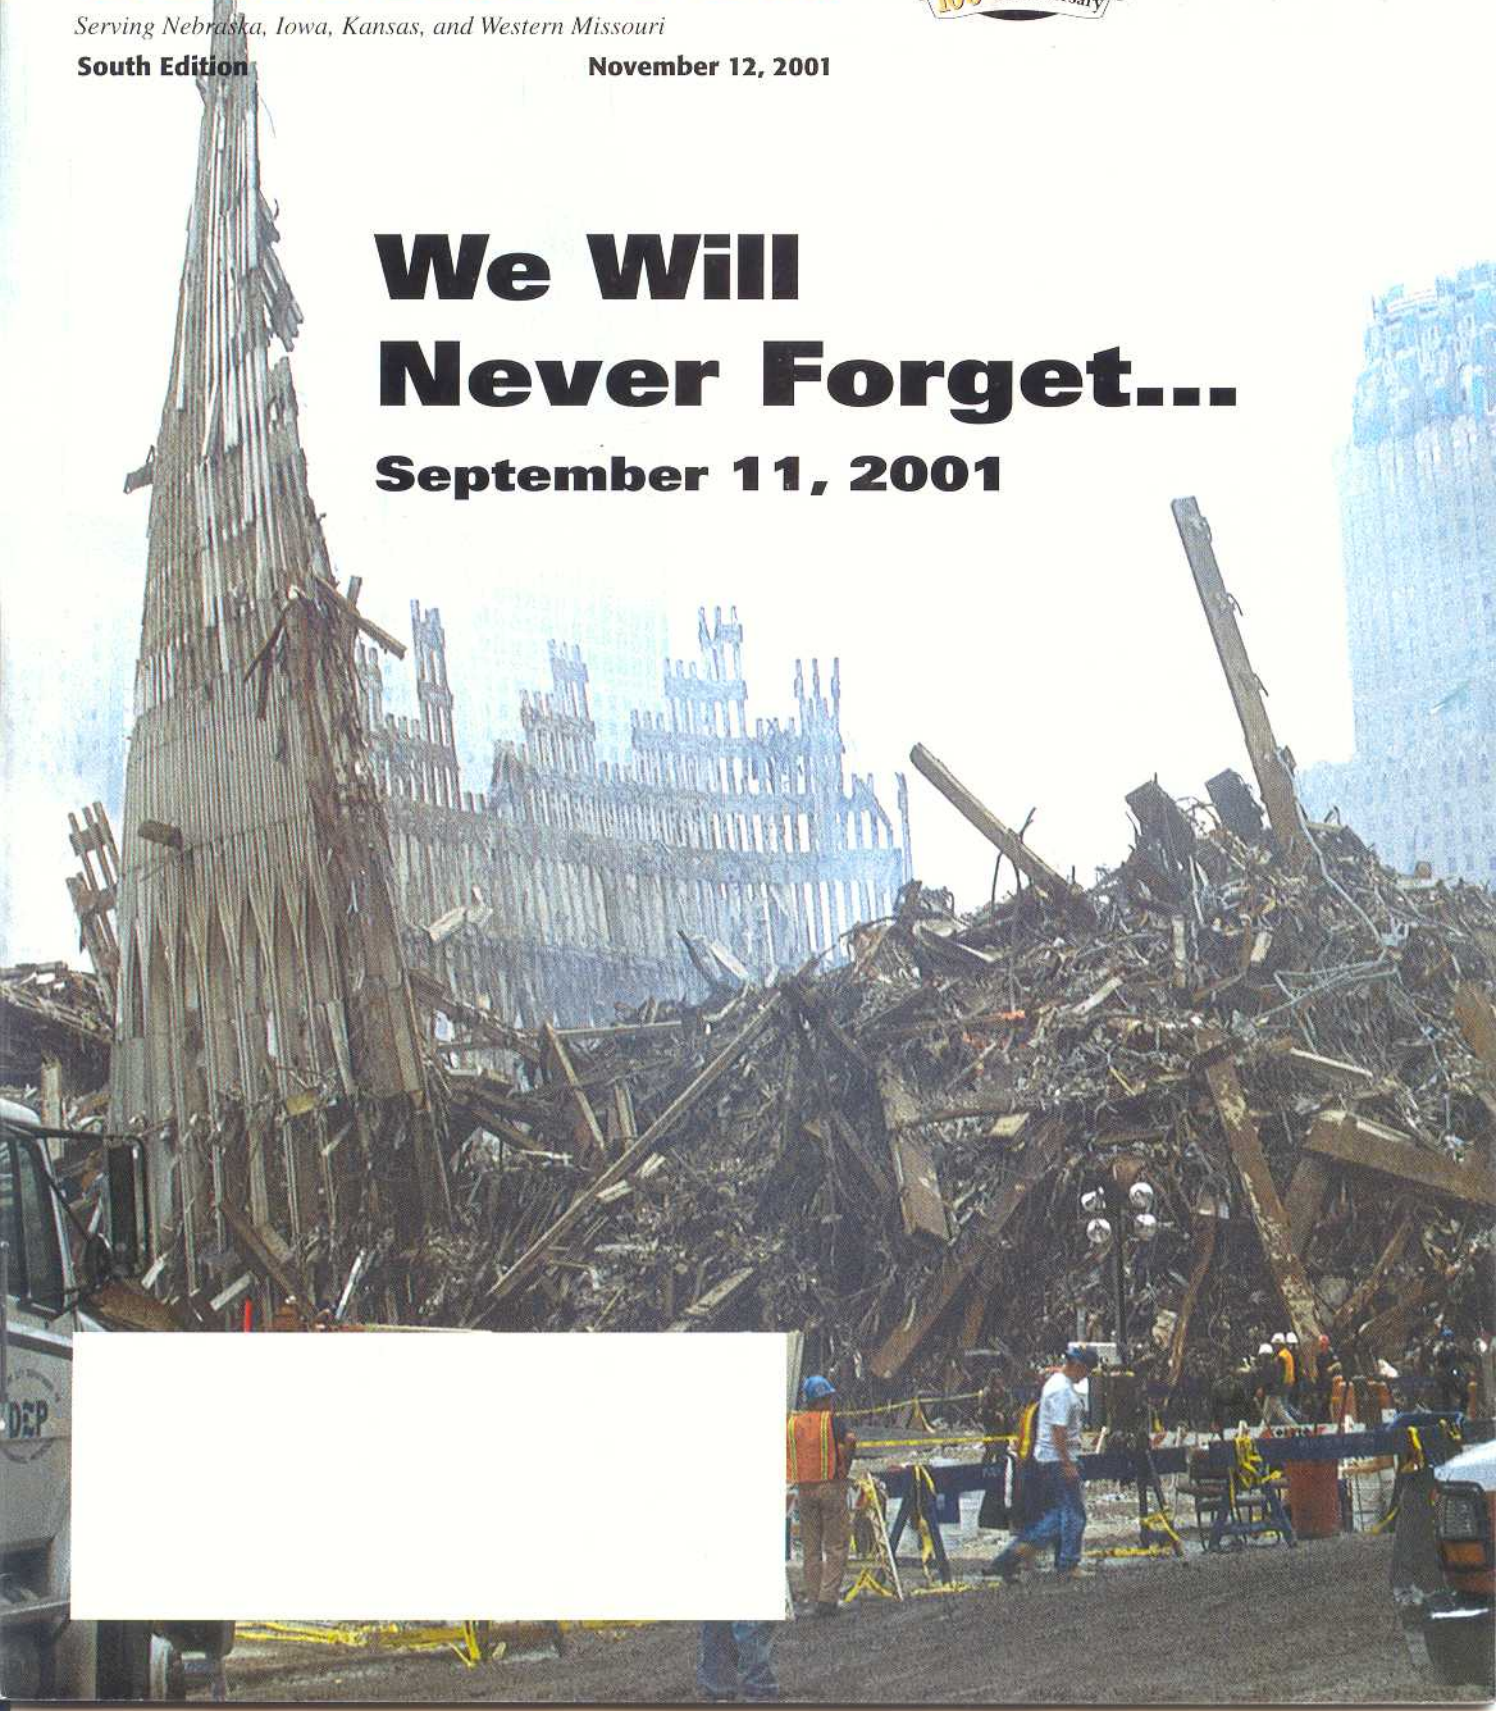



# PCI Installs Geopier Elements

■ story by Carol Carder, courtesy of Geopier Foundation Co.  
photos by Curt Grandia

**W**ith more than 80 years in heavy construction, Peterson Contractors, Inc. (PCI), has moved a lot of dirt. In recent years, though, the Iowa contractor has become a specialist in stopping soil movement.

Based in Reinbeck, PCI installs Geopier foundation systems in 25 states, including Iowa, Kansas, Missouri and Nebraska. As a licensee of Geopier Foundation Company (GFC) of Scottsdale, Ariz., PCI mobilizes its Geopier crews to jobs from North Dakota through the Midwest and south to Florida.

According to Dr. Nathaniel Fox, who designed and patented the Rammed Aggregate Pier System and is president of GFC, PCI will complete 40 percent of all Geopier installations in the country this year.

Geopier elements are constructed by building successive layers of densely compacted aggregate in a drilled or excavated cavity. Typical Geopier diameters are 24 inches, 30 inches and 36 inches. Undulating Geopier shafts consist of 12-inch thick layers of well-graded aggregate compacted with high-energy impact ramming action. Using special tamping equipment, the system compacts the aggregate and pre-stresses the surrounding soil. The result is improved strength and stiffness of the combined pier-soil system.

To build Geopier elements, PCI operators use a Lo-Drill attached to a Caterpillar 315 excavator to drill a 30-inch diameter hole to the design depth, generally from 8-20 feet deep. An operator

A Lo-Drill attached to a Caterpillar 315 excavator plays an important part in PCI's installation of Geopier elements, drilling holes up to 20 feet deep.



using a Takeuchi TL126 skid loader with a custom bucket brings the aggregate to the hole where the bottom bulb is built with a 30-inch thick lift of clean stone without fines. Another operator uses a CAT 315 excavator with an NPK 8X hydraulic demolition hammer to ram the aggregate. The NPK hammer is modified with a downhole extension and a short tamber shaft and foot.

Each layer of aggregate dumped into the hole is rammed with 1.7-million foot-pounds of energy per minute. Then, 12-inch lifts of highway grade roadbase with some fines are built in layers up the shaft, and each lift is tamped with the same



With the hole drilled, a PCI operator uses a Takeuchi TL126 skid steer loader to carry the aggregate and dump it, in layers, into the hole.



energy. The aggregate bulging out laterally into the surrounding soil increases the load-bearing capacity. Depending on the soil stiffness, from 25 to 100 percent more compacted rock than the volume of the shaft is used. A footing, mat, or concrete cap seals the tops of many piers and others are topped with earthfill.

Geopier elements offer builders an intermediate foundation system between shallow footings and mats and deep foundations such as drilled caissons and driven steel piles. The system also makes over-excavation and replacement unnecessary. GFC is so confident of the performance of its design/build foundation, the company warrants total settlement to be no more than 1 inch for typical buildings and no more than 1-1/2 inches for parking structures. Differential settlements are designed to be less than one half of total settlement magnitudes.

PCI has installed Geopier solutions designed by The Pro Firm, of Des Moines, to support highway retaining

walls, to stop settlement of a highway slab, to halt landslides, and to support a box culvert on a silty clay creekbed on a recent Iowa job.

Working as a subcontractor to Godbersen-Smith Construction Company of Ida Grove, Iowa, PCI installed 276 piers to support a 48-meter long poured-in-place box culvert rehabilitating a bridge on Route 191 near Neola, Iowa. According to Mark Freier of Godbersen-Smith, the Iowa Department of Transportation chose the culvert installation to keep the highway open during most of the repair and also so curbs could be removed later to widen the section of roadway.

"This job had some challenging aspects such as the tight working space with just 20 feet of headroom under the bridge and the need to case some of the holes until the aggregate could be rammed because of the high water table," Peterson said.

The performance expected from the Geopier elements, according to Steve Megivern, P.E., of The Pro Firm, is



After the aggregate is dumped into the hole, PCI uses an NPK tamping attachment to ram the aggregate, stabilizing and strengthening the pier-soil system.

## "Sell the Best Equipment, Provide the Best Service"

*Our simple, yet lasting, corporate philosophy.*

### 14 Full Service Facilities

- Quality repairs
- Guaranteed workmanship
- Fully trained equipment specialists
- Fast turn-around

### Specialized Service Shops

- Repairs and rebuilds on engines, transmissions and components
- Exchange engines, short blocks, transmissions

### Hydraulic/Machine Shops

- Total hydraulic cylinder, pump and motor repair
- Hose bench and metro mobile hose service
- In-the-shop or on-site mobile machine shop service

### Track Shops

- Undercarriage rebuild
- Exchange or new components and rollers

### Fabrication/Weld Shops

- Custom repair and fabrication
- Field welding
- Carbide applications



**ZIEGLER** 

**515/270-2800 • 800/342-7002**

10315 HICKMAN ROAD  
DES MOINES, IA 50322

FT. DODGE • MASON CITY • POSTVILLE • SIOUX CITY



reduction of the predicted total settlements from 55 centimeters without any reinforcement to only 10 centimeters with the piers. Professor David White,

civil engineering associate at Iowa State University in Ames, is monitoring the inclinometers ISU installed to measure any future movements.

One member or another of the Peterson family has been pushing dirt around in Iowa since 1918. That's the year Cork Peterson's grandfather Martin Peterson started grading roads in Laurens, Iowa. His father Gale and uncle Dale (twins) followed in the family footsteps as roadwork contractors, also in Laurens. Cordell Peterson – no relation – founded Peterson Contractors Inc. (PCI) in Reinbeck, Iowa, in 1963. Cork joined him part-time while in college in 1965 and became a full-time partner in 1968 after returning from the U.S. Army Corps of Engineers.

"We've been really low profile for years doing grading, earthwork, heavy demolition, structures and underground utilities," Peterson said. "We've always

turned down requests from publications and you wouldn't be hearing about us now if it wasn't for the Geopier foundation systems we're installing."

As more designers and owners discover cost savings up to 70 percent over conventional deep foundations and as more contractors discover the smooth sequencing of Geopier installation into construction activities, Peterson expects his foundation business will continue to grow.

Since its inception in 1990, the Geopier organization has designed/built more than 350 major projects in 35 states and now has Geopier licensees in 7 countries worldwide.

For additional information, visit Geopier Foundation Co., Inc., on the web at [www.geopiers.com](http://www.geopiers.com). □

Earlier this year, PCI's installation of Geopier elements also helped solve a problem in Iowa's Dallas County on a reoccurring landslide mid-slope on a steep, curved grade where County Road P-48 descends to the Raccoon River. The slide had plagued the Iowa Engineering Department for 32 years.

Before paving could begin, a landslide developed in the weathered shale and glacial till soils underlying a filled portion of the roadway. Filling and leveling the upper portion of the displaced soil mass proved only a temporary repair. At least 10 times, county contractors had performed significant work on the road and slide area, including the removal of a 450-foot section of the undermined pavement and installation of 300 linear feet of sheet pile in an unsuccessful attempt to cut off the slope movement.

Solutions such as retaining walls were deemed too expensive as was the million-dollar fix of partial replacement of the

—Continued on page 44

# SHAWNEE STEEL:

The Single, Reliable Source That Will Save You Money, Time and Labor...Plus...Improve and Standardize Inlet Appearance!

## CURB INLETS



- Shawnee Steel has been the midwest's leading steel curb inlet source since 1965
- Ready-to-ship units of 4-ft. to 10-ft. lengths, and 6" and 8" throat widths

## REUSABLE INLET FORM



- Attractive, uniform, and effective inlet curvatures and proper sizes

## HEAVY DUTY BAR GRATES



- Many KDOT standard designs are inventoried
- Computerized cutting equipment
- Problem free installation



## AREA PIPE GRATES

- Fabricated in fixtures to insure dimensional uniformity and squareness



**SHAWNEE STEEL & WELDING, INC.**

KDOT & AWS Certified Welders

6124 Merriam Drive • Merriam, KS 66203  
913-432-8046 • 1-800-533-5807  
FAX 913-432-0819

Street State Form 2000  
Department of Ownership, Management, and Circulation

1. Applicant Name: **MIDWEST CONTRACTOR** (Print Name)  
2. Filing Date: **09/01**

3. Issue Frequency: **24** (1. No. of Issues Published Annually)  
4. Annual Subscription Price: **12.00**

5. Complete Mailing Address of Known Office of Publication (Street, city, county, state, and ZIP+4):  
224 Research Court #200  
Nashville, TN 37203

6. Complete Mailing Address of Headquarters or General Business Office of Publisher (Not printer):  
224 Research Court #200  
Nashville, TN 37203

7. Full Names and Complete Mailing Addresses of Publisher, Editor, and Managing Editor (Do Not Leave Blank):  
Publisher Name and Complete Mailing Address:  
**JIM BELLIN** 224 Research Court #200 Nashville, TN 37203  
Editor Name and Complete Mailing Address:  
**CURT GRANADA** 12 COBBLE AVE EDWARDS BLUFFS WY 82401

8. Owner (Do Not Leave Blank. If the publication is owned by a corporation, give the name and address of the corporation immediately followed by the names and addresses of all individuals owning or holding 1 percent or more of the total amount of stock. If not owned by a corporation, give the names and addresses of all individual owners. If owned by a partnership or other unincorporated firm, give its name and address, as well as those of each individual owner. If the publication is published by a corporation or other organization, give its name and address.)

9. Known Bondholders, Mortgagees, and Other Security Holders Owning or Holding 1 Percent or More of Total Amount of Bonds, Mortgages, or Other Securities (If none, check here):  
None

10. Publication Title: **Midwest Contractor**

11. Issue Date for Circulation Data Below:  
**09/01**

12. Extent and Nature of Circulation:  
Average No. Copies Each Issue During Preceding 12 Months: **1,184**  
Average No. Copies Each Issue During Preceding 3 Months: **1,184**

13. Publication of Statement of Ownership:  
 Publication not required

14. Signature and Title of Publisher, Business Manager, or Owner:  
*[Signature]* Publisher

